WMF COFFEE MACHINES

Base Information

WMF presto! Type 1400



WMF presto! 1400

Application Espresso, Milky Coffee and Hot Chocolate Steam and Tea Water

Capacity For Outlets up to 100 Cups/Day

Service Period Approximately 8,000 brewing

The WMF Presto is the latest milestone in a tradition of coffee machine production dating back to 1927. The experience acquired over the years, particularly in the demanding world of professional catering, has resulted in a machine that stands comparison with any in the world in terms of quality, finish, innovation and design.

And it has those typically German qualities of good workmanship, reliability and especially hygiene, something that will be appreciated when it comes to the automatic cleaning programmes, if not before.

Truly a genuine Made in Germany product, but if we may say so, "for the whole world".

IECHNICAL DATA

Standard Models		1400.0021	1400.0006	
Hourly Output	Espresso	100 Cups/h	100 Cups/h	
	Café Crème	90 Cups/h	90 Cups/h	
	Cappuccino	N.A.	90 Cups/h	
	Choc (optional)	80 Cups/h	80 Cups/h	
Product Containers	Coffee Bean Hopper	(1 optiona	(1 optional 2) 500 g	
	Choc Powder (optional)	500g (optional N	500g (optional Milk Powder)	
Dimension	Height x Width x Depth	668 x 323 x 555 mm		
	Weight	~ 35 kg		
Connections	Power Supply	1P/N/E 230V 50/60Hz / 2.2 kW		
	Water Supply	1/2" (minimum 1.5 bar) / Tank 4.0 L		
	Drainage	25 mm		
Options	Steam / Frothier head	NO	YES	
	Built in milk cooler	NO	YES	
	Mobile Station	YES	YES	
	Cup Rack	YES	YES	
	Cup & Cool	YES	YES	





WMF COFFEE MACHINES


Planing Information

WMF presto! Type 1400

Modular concept for 1-2 coffee grinders and/or 1 chocolate or milk powder dispenser

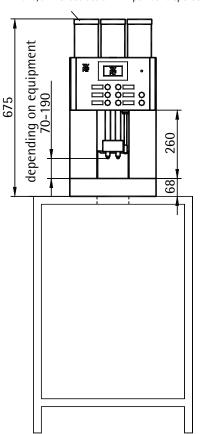

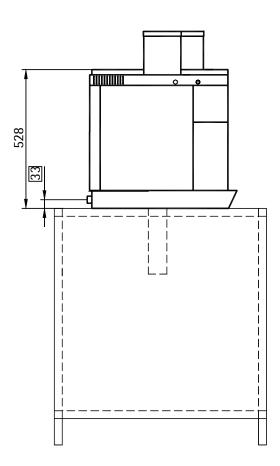

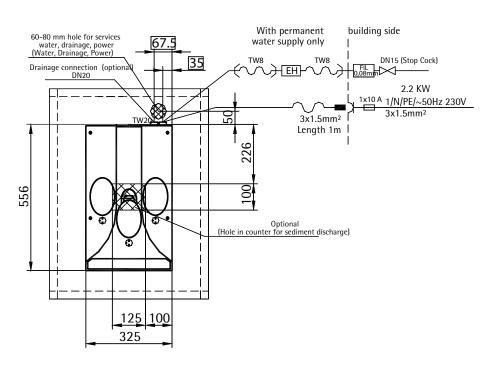



WMF COFFEE MACHINES

Data Sheet

WMF presto! Type 1400

Brewing process: Speciality coffees and drinking chocolate with and without milk or milk

powder topping Drinking chocolate made of chocolate powder, hot

water and addition of milk.

Daily output: max. 100 cups of speciality coffees with and without added milk or milk

foam, 10 L hot water total output per day

Option: "Aquaflex" switchable water connection types for tank or fixed water

connection operation, steam dispenser, integrated thermoelectric milk cooler, indirect lighting in various colours, with fixed water connection water preparation filter (dimensions 126 mm \emptyset x 490 mm height),

drainage connection DN 19,

Option: Tank filter (33.2332.5000) for WMF Presto with water tank. For optimis-

ing water quality and reduction of calcification

Accessories: multitool, cleaning brush, basic equipment decalcifier, cleaning tablets,

milk cleaner

Degree of protection: IPX0

Protection class I Protection class I

Perceptible heat emission: 0.11 kWh/h in standby mode

Perceptible heat emission: 2.11 kWh/h in maximum mode

Cont. sound level (Lpa) < 70 dB (A)

Water connection: DN 15, (3/8") e.g. corner valve

Flow pressure: with fixed water connection at least 0.2 MPa (2.0 bar), at 2 L min.

Miscellaneous: coffee machine with dry residue discharge into an integrated drawer

or optional with sediment discharge into a building-side container

Drain: drip trough without drain. Optional drain DN 19, gradient at least 2%

Empty weight: ca. 35-40 kg